AB Electric Services, LLC
250 County Road 215
Bertram, TX 78605
Contact: Duane @ 512-277-4069
Date: November 28, 2023
Job Bid : Stargazer entrance & mail box power and lighting
Project Address: Naruna, TX

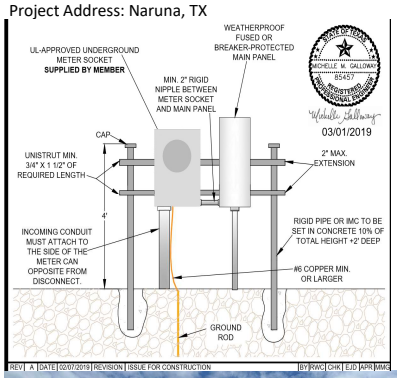



Project summary:

* 200 Amp Service Rack ~ 10' trenching (provided by other) & Conduit to main pole with riser and weather head 3" Schedule 40/80 PVC with 36 degree sch 80 Long Sweep 90's, coordinate job with PEC and attain appropriate inspections during construction and at completion of job. Target minimum 30-36" below sub grade

*Install 2" conduit and urd conductors with ground from proposed installed rack ~150 foot to 125A Panel with breakers in traffic circle on existing conduits supported by steel conduit concreted in post holes, this panel will support lighting and gate load circuits. Back fill trench

*Install 2 accent lantern lights (pictured above) on each side of entrance - pull wire and install dusk to dawn sensor, Install 1 accent light to shine up from ground in center on Metal Art to be placed between cattle guards

*Install 5 lights in mailbox area similar to neighboring mail area photo above. Wire hot with dusk to dawn sensor

*Install circuits for gate from panel - pull appropiate wire and connecting conduit for 120VAC to gate controller

Project Summary of charges:		
200 Amp Service Rack system	$	3,200.00
Install 125A Panel with additional 2" conduit & URD wire to service rack near electric pole	$	2,000.00
3 accent Lights at gate area wired to dusk to dawn sensors	$	2,000.00
Install 5 lights with circuits in conduit for mail box area with 3/4" conduit back to metering rack - Dusk to Dawn sensor controlled	$	1,450.00
Install circuits to power gate area in existing conduits	$	780.00
Total project estimate	$	9,430.00

Thank you for your business!

A. Duane Bullock
Managing Partner
AB Electric Services, LLC

*Changes orders are welcomed but may require additional costs.
*Commodity prices can fluxuate possibly impacting costs, AB Electric Services will try to hold price firm 30 days.
* If rock saw or additional Rock hammering and trenching needed will require additional costs

Customer acceptance of proposal:

Signature Date